

OM SENI

AZ5525-01F

1-Line Bi-directional TVS Diode

Features

- Ultra small package: 1.0x0.6x0.5mm
- Ultra low capacitance: 15pF typical
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 6A (8/20 μs)
- RoHS Compliant

Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players
- Keypads, Side Keys, LCD Displays

Mechanical Characteristics


- Package: DFN1006
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 10,000pcs
- Reel Size: 7 inch

Absolute Maximum Ratings ($T_{\text{amb}}=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	Ppp	80	W
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 30	Kv
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	T _J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T _{STJ}	-55 to +150	$^{\circ}\text{C}$


Electrical Characteristics ($T_{\text{A}}=25^{\circ}\text{C}$ unless otherwise specified)

Part Number	Device Marking	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C @1A	V _C		I _R μA (Max)	C (Pf) (Typ.)
						(Max)	(@A)		
AZ5525-01F	B2	5	6	1	7.5	12.5	6	0.5	15


Dimensions DFN1006**Pin Configuration**

OM SENI


Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

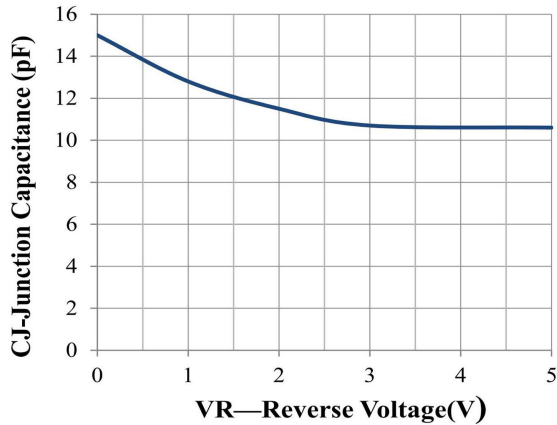



Junction Capacitance vs. Reverse Voltage

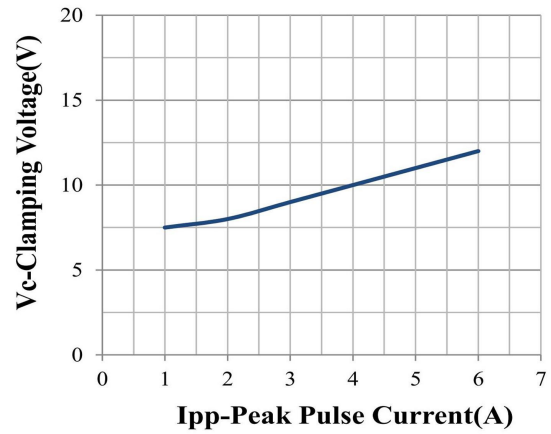


Clamping Voltage vs. Peak Pulse Current

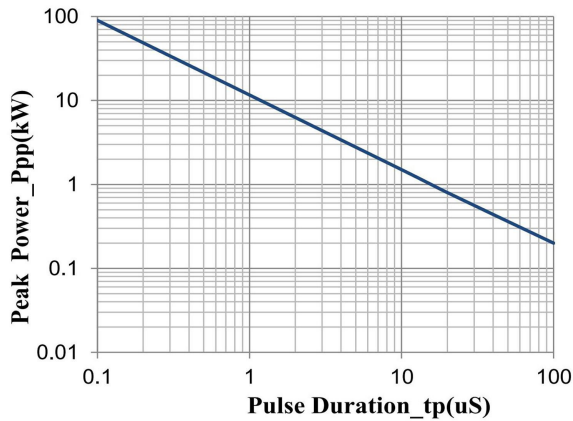

Peak Pulse Power vs. Pulse Time

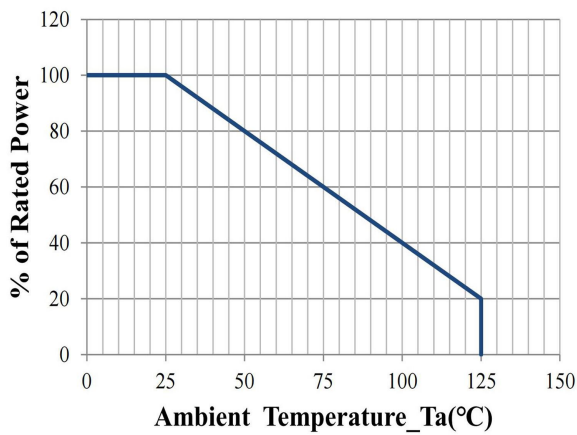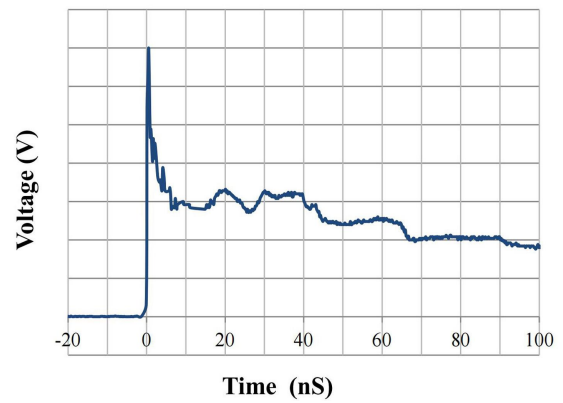

Power Derating Curve

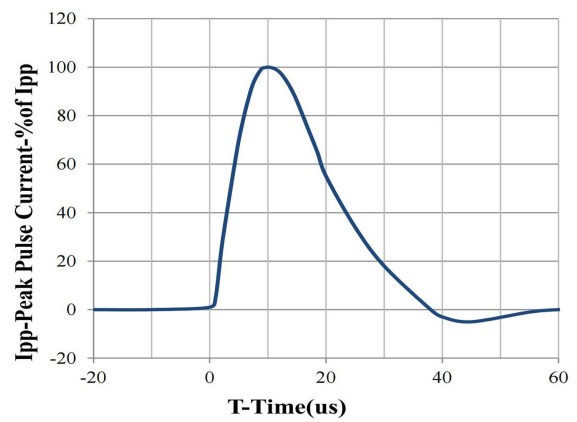


8 X 20us Pulse Waveform

OM SENI


Ordering Information

PREFERRED P/N	PACKAGE	SIZE(mm)	DELIVERY MODE	MPQ(PCS)
	DFN1006-2L	1.00×0.60×0.37	7" REEL	10,000

Recommended Soldering Conditions

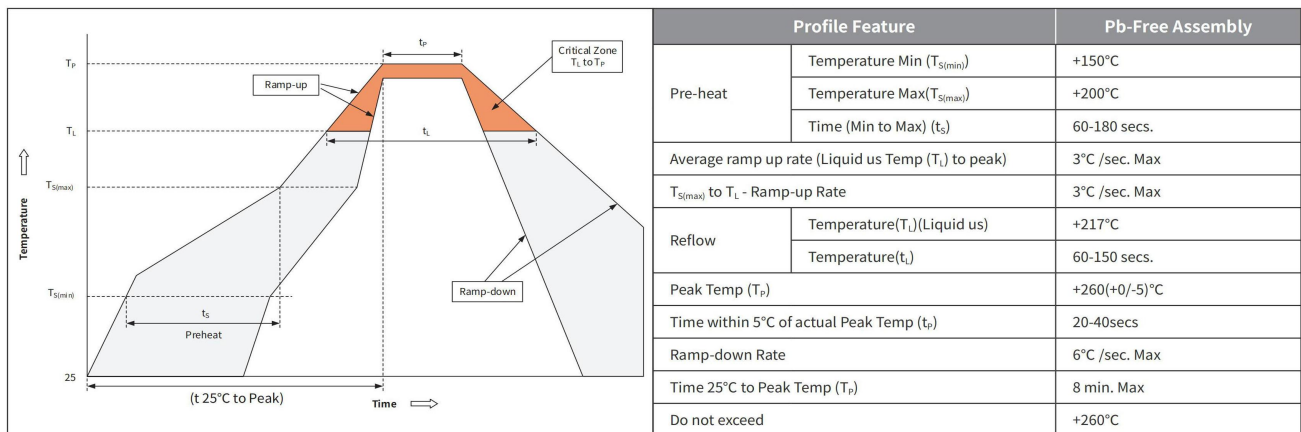

Package Outline Dimensions (DFN1006-2L)

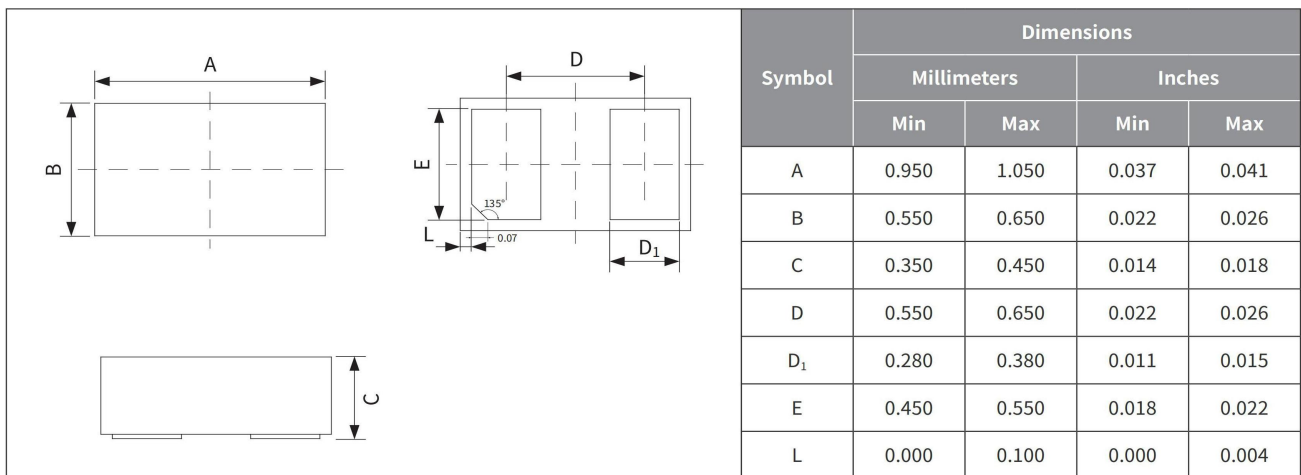

Suggested Pad Layout

