

OM SENI

ESD5311N

1-Line Bi-directional TVS Diode

Features

- Ultra small package: 1.0x0.6x0.5mm
- Ultra low capacitance: 0.3pF typical
- Ultra low leakage: nA level
- Low operating voltage: $\pm 5V$
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - – IEC 61000-4-2 (ESD) immunity test
 - Air discharge: 30kV
 - Contact discharge: $\pm 25kV$
 - – IEC 61000-4-5 (Lightning) 4A (8/20 μs)
- RoHS Compliant
- Lead Finish: NiPdAu


Mechanical Characteristics

- Package: DFN1006-2 (0402)
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Shipping Qty : 10000/7Inch Or 3000/7Inch Tape & Reel

Applications

- Cellular Handsets & Accessories
- Digital Visual Interface (DVI)
- Display Port
- MDDI Ports
- USB Ports

Dimensions and Pin Configuration



Marking: 88

OM SENI

Absolute Maximum Ratings (T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	P _{pk}	70	W
Peak Pulse Current (8/20μs)	I _{pp}	4	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	kV
ESD per IEC 61000-4-2 (Contact)		±25	
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V _{RWM}			5	V	
Breakdown Voltage	V _{BR}	6.5	7.5	9.0	V	I _T = 1mA
Reverse Leakage Current	I _R			0.08	uA	V _{RWM} = 5V
Clamping Voltage	V _C			9	V	I _{pp} =1A(8x 20us pulse)
Clamping Voltage	V _C			15	V	I _{pp} =4A(8x 20us pulse)
Junction Capacitance	C _J		0.3		pF	V _R = 0V, f = 1MHz

OM SENI

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

Fig1. 8/20 μs Pulse Waveform

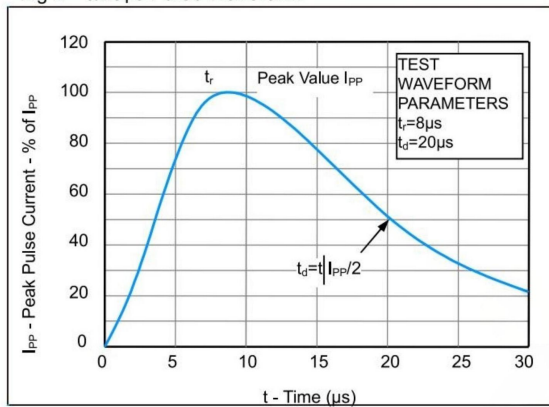


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)


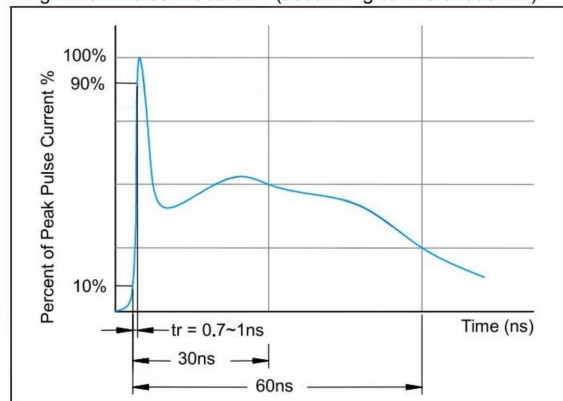


Fig3. Power Derating Curve

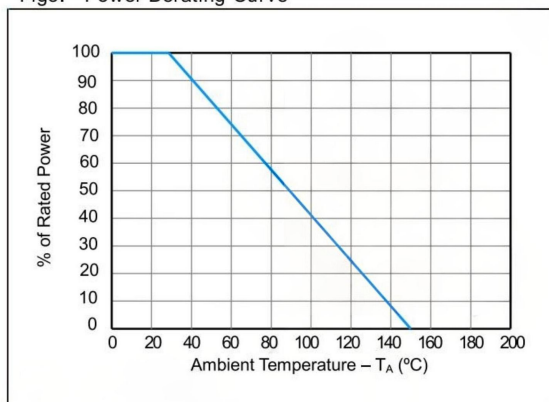

OM SENI

Ordering Information

PREFERRED P/N	PACKAGE	SIZE(mm)	DELIVERY MODE	MPQ(PCS)
	DFN1006-2L	1.00×0.60×0.37	7" REEL	10,000

Recommended Soldering Conditions



Package Outline Dimensions (DFN1006-2L)

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.950	1.050	0.037	0.041
B	0.550	0.650	0.022	0.026
C	0.350	0.450	0.014	0.018
D	0.550	0.650	0.022	0.026
D ₁	0.280	0.380	0.011	0.015
E	0.450	0.550	0.018	0.022
L	0.000	0.100	0.000	0.004

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
J	0.50	0.60	0.020	0.024
K	0.25	0.35	0.010	0.014
M	0.55	0.65	0.022	0.026