www.omseni.com

OM SENI

MMBD352LT1G, MMBD353LT1G, MMBD354LT1G, MMBD355LT1G
Dual Hot Carrier Mixer Diodes

These devices are designed primarily for UHF mixer applications but are suitable also for use in detector and ultra−fast switching circuits.

Features

- Very Low Capacitance − Less Than 1.0 pF @ Zero V
- Low Forward Voltage − 0.5 V (Typ) @ I_F = 10 mA
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS (EACH DIODE)

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	7.0	V_{CC}

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR−5 Board, (Note 1) T_A = 25°C Derate above 25°C	P_D	 225 1.8	 mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation Alumina Substrate, (Note 2) T_A = 25°C Derate above 25°C	P_D	 300 2.4	 mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−55 to +150	°C

1. FR−5 = 1.0 x 0.75 x 0.062 in.
2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.



SOT−23 (TO−236)
CASE 318



MMBD352LT1G
STYLE 11



MMBD353LT1G
NSVMMBD353LT1G
STYLE 19



MMBD354LT1G
NSVMMBD354LT1G
STYLE 9



MMBD355LT1G
STYLE 12

MARKING DIAGRAM



Mxx = Device Code
M = Date Code*
▪ = Pb−Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Marking	Package	Shipping†
MMBD352LT1G	M5G	SOT−23 (Pb−Free)	3,000 Units / Tape & Reel
MMBD353LT1G	M4F	SOT−23 (Pb−Free)	3,000 Units / Tape & Reel
MMBD354LT1G	M6H	SOT−23 (Pb−Free)	3,000 Units / Tape & Reel
MMBD355LT1G	MJ1	SOT−23 (Pb−Free)	3,000 Units / Tape & Reel

www.omseni.com

OM SENI

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (EACH DIODE)

Rating	Symbol	Min	Max	Unit
Forward Voltage (I_F = 10 mAdc)	V_F	–	0.60	V
Reverse Leakage Current (Note 3) (V_R = 3.0 V) (V_R = 7.0 V)	I_R	– –	0.25 10	μA
Capacitance (V_R = 0 V, f = 1.0 MHz)	C	–	1.0	pF

TYPICAL CHARACTERISTICS

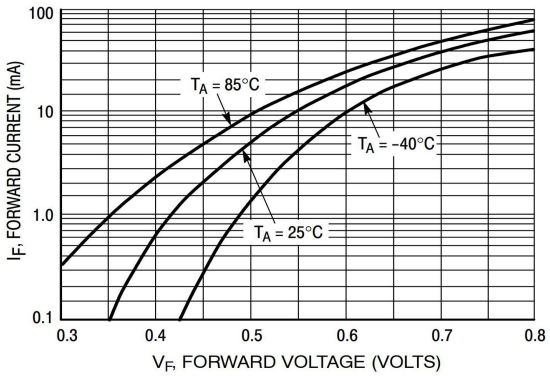

Figure 1. Forward Voltage

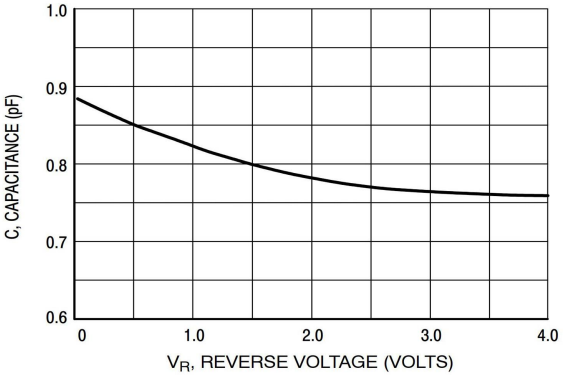

Figure 2. Capacitance

PACKAGE DIMENSIONS

SOT–23 (TO–236)
CASE 318–08
ISSUE AR







NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

DIM	MILLIMETERS MIN	NOM	MAX	INCHES MIN	NOM	MAX
A	0.89	1.00	1.11	0.035	0.039	0.044
A1	0.01	0.06	0.10	0.000	0.002	0.004
b	0.37	0.44	0.50	0.015	0.017	0.020
c	0.08	0.14	0.20	0.003	0.006	0.008
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
e	1.78	1.90	2.04	0.070	0.075	0.080
L	0.30	0.43	0.55	0.012	0.017	0.022
L1	0.35	0.54	0.69	0.014	0.021	0.027
H_E	2.10	2.40	2.64	0.083	0.094	0.104
T	0°	---	10 °	0 °	---	10 °

MMBD352LT1G
STYLE 11:
PIN 1. ANODE
2. CATHODE
3. CATHODE–ANODE

MMBD353LT1G
NSVMMBD353LT1G
STYLE 19:
PIN 1. CATHODE
2. ANODE
3. CATHODE–ANODE

MMBD354LT1G
NSVMMBD354LT1G
STYLE 9:
PIN 1. ANODE
2. ANODE
3. CATHODE

MMBD355LT1G
STYLE 12:
PIN 1. CATHODE
2. CATHODE
3. ANODE

RECOMMENDED SOLDERING FOOTPRINT*



DIMENSIONS: MILLIMETERS