www.omseni.com

OM SENI


MMDL6050T1G
Switching Diode

Features

- S Prefix for Automotive and Other Applications Requiring Uniqu Site and Control Change Requirements
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant*



PLASTIC
SOD−323
CASE 477
STYLE 1



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	70	Vdc
Peak Forward Current	I_F	200	mAdc
Peak Forward Surge Current	$I_{FM(surge)}$	500	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 1) @T_A = 25°C Derate above 25°C	P_D	200 1.57	mW mW/°C
Thermal Resistance, Junction−to−Ambient	RθJA	635	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−55 to 150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. FR-4 Minimum Pad.

MARKING DIAGRAM



5A = Device Code
M = Date Code*
▪ = Pb−Free Package


(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Reverse Breakdown Voltage ($I_{(BR)}$ = 100 μAdc)	$V_{(BR)}$	70	–	Vdc
Reverse Voltage Leakage Current (V_R = 50 Vdc)	I_R	–	0.1	μAdc
Forward Voltage (I_F = 1.0 mAdc) (I_F = 100 mAdc)	V_F	0.55 0.85	0.7 1.1	Vdc
Reverse Recovery Time (I_F = I_R = 10 mAdc, $I_{R(REC)}$ = 1.0 mAdc) (Figure 1)	t_{rr}	–	4.0	ns
Capacitance (V_R = 0 V)	C	–	2.5	pF

www.omseni.com

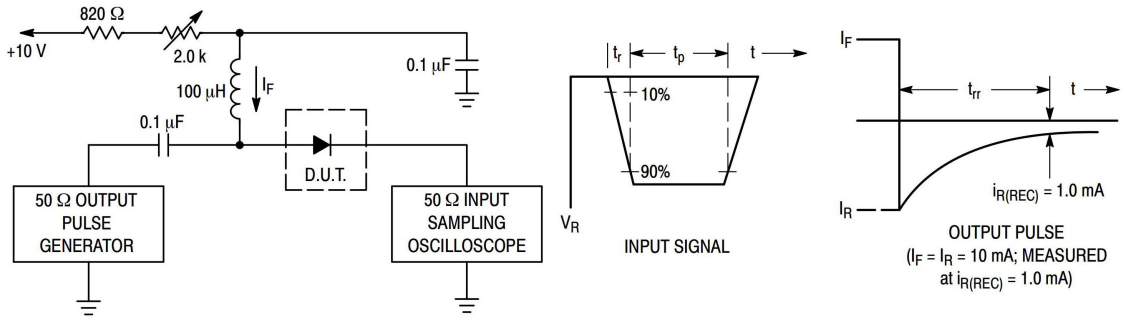

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.
3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

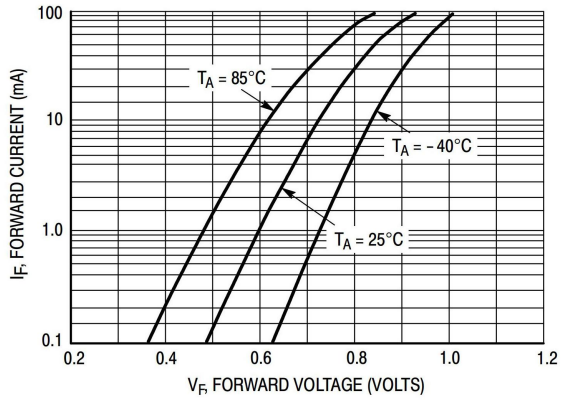


Figure 2. Forward Voltage

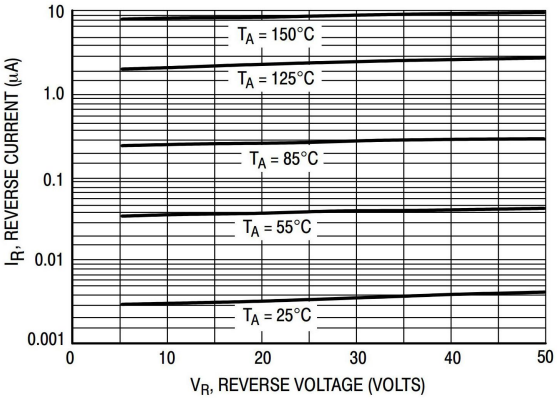


Figure 3. Leakage Current

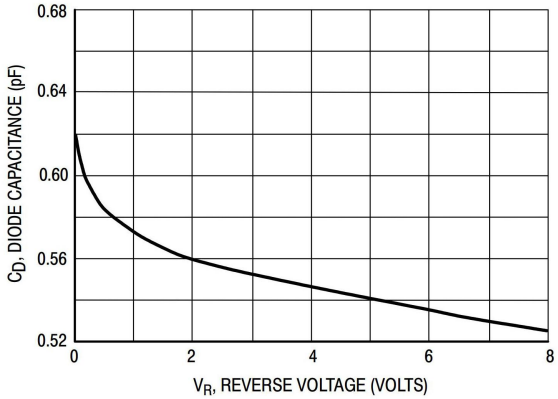



Figure 4. Capacitance

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-323	R1	0.0048	3000	30000	240000	7''

Package Outline Dimensions (SOD-323)

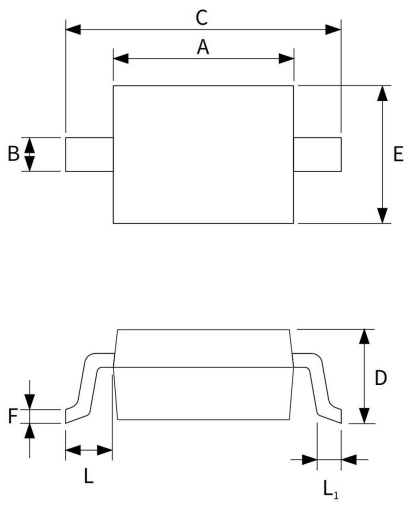

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	0.25	0.40	0.010	0.016
C	2.30	2.80	0.091	0.110
D	0.80	1.10	0.031	0.043
D_1	0.80	0.90	0.031	0.035
E	1.20	1.40	0.047	0.055
F	0.08	0.18	0.003	0.007
L	0.475REF		0.019REF	
L_1	0.25	0.40	0.010	0.016
H	-	0.14	-	0.006

Suggested Pad Layout

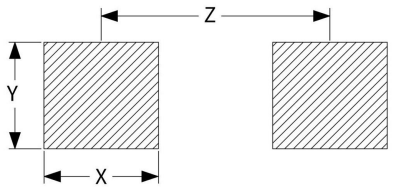

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
X	0.65	0.75	0.026	0.030
Y	0.65	0.75	0.026	0.030
Z	2.10	2.20	0.084	0.088