www.omseni.com

OM SENI

MMSD914T1G
Switching Diode

Features


- SOD−123 Surface Mount Package
- High Breakdown Voltage
- Fast Speed Switching Time
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant*



SOD−123
CASE 425
PLASTIC



MARKING DIAGRAM



5D = Specific Device Code
M = Date Code
▪ = Pb−Free Package

(Note: Microdot may be in either location)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	100	Vdc
Peak Forward Current	I_F	200	mAdc
Peak Forward Surge Current	$I_{FM(surge)}$	500	mAdc
Non−repetitive Peak Forward Surge Current Pulse Width =1 second Pulse Width =1 micro second	I_{FSM}	 1.0 2.0	 A A

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR−5 Board (Note 1) T_A = 25°C Derate above 25°C	P_D	425 3.4	mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	290	°C/W
Junction and Storage Temperature Range	T_J, T_{stg}	−55 to +150	°C


1. FR−5 = 1.0oz Cu, 1.0in^2 pad

www.omseni.com

OM SENI

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Reverse Breakdown Voltage (I_{BR} = 100 μAdc)	$V_{(BR)}$	100	–	Vdc
Reverse Voltage Leakage Current (V_R = 20 Vdc) (V_R = 75 Vdc)	I_R	 – –	 25 5.0	 nAdc μAdc
Forward Voltage (I_F = 10 mAdc)	V_F	–	1000	mVdc
Diode Capacitance (V_R = 0 Vdc, f = 1.0 MHz)	C_D	–	4.0	pF
Reverse Recovery Time (I_F = I_R = 10 mAdc) (Figure 1)	t_{rr}	–	4.0	ns

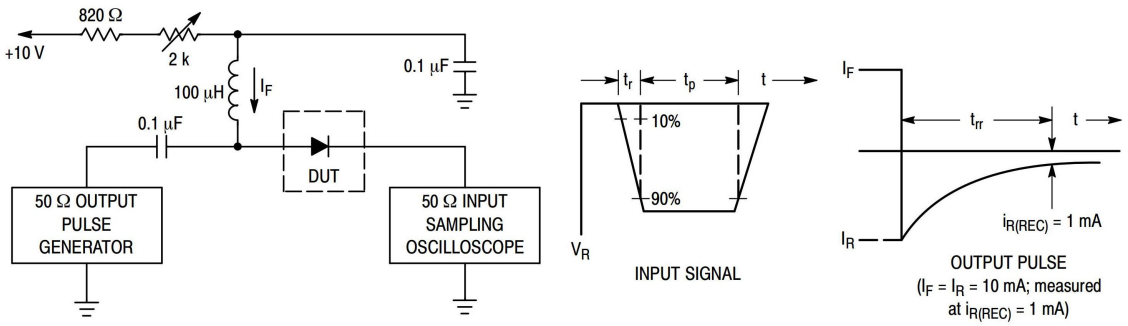

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.
3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

OM SENI

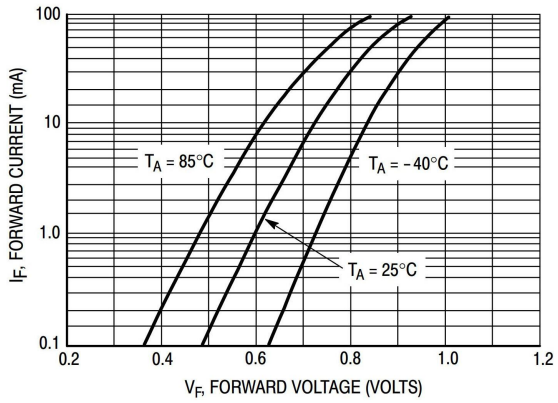


Figure 2. Forward Voltage

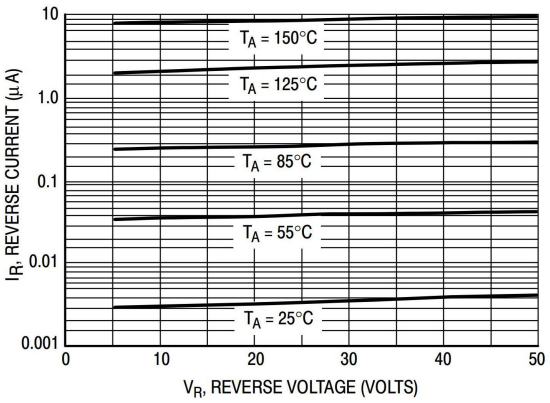


Figure 3. Leakage Current

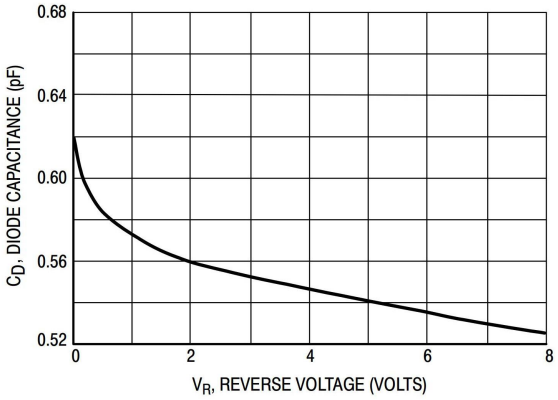



Figure 4. Capacitance

OM SENI

Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-123	R1	0.012	3000	30000	240000	7''

Package Outline Dimensions (SOD-123)

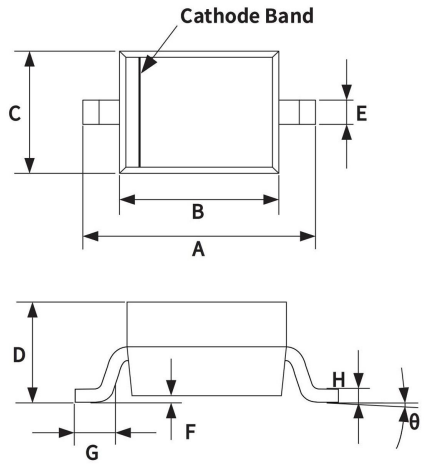

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.055	0.071
D	0.95	1.35	0.140	0.152
E	0.51	0.71	0.037	0.053
F	-	0.15	-	0.006
G	0.15	0.45	0.006	0.008
H	0.08	0.25	0.003	0.010
θ	-	8°	-	8°

Suggested Pad Layout

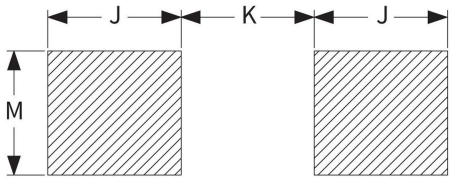

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.91	-	0.036	-
K	-	2.36	-	0.092
M	1.22	-	0.048	-