

OM SENI

SMAF Surface Mount Schottky Barrier Rectifier

Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C


SS22F THRU SS220F

Reverse Voltage
20-200 V

Forward Current
2 Ampere

Applications

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping.

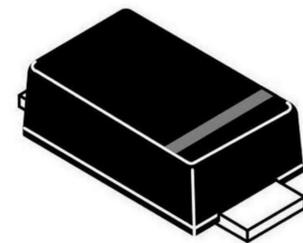


SMAF

Mechanical Data

- Case: SMAF
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Function Diagram

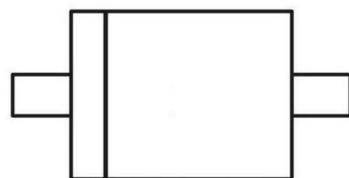

Maximum Ratings (Ta=25°C Unless otherwise specified)





PARAMETER	SYMBOL	UNIT	SS22F	SS24F	SS26F	SS28F	SS210F	SS215F	SS220F
Device marking code			SS22F	SS24F	SS26F	SS28F	SS210F	SS215F	SS220F
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	20	40	60	80	100	150	200
Maximum RMS Voltage	V_{RMS}	V	14	28	42	56	70	105	140
Maximum DC blocking Voltage	V_{DC}	V	20	40	60	80	100	150	200
Maximum Average Forward Rectified Current @ 60Hz sinewave, Resistance load, TL (Fig.1)	$I_{F(AV)}$	A	2.0						
Non-repetitive Peak Forward Surge Current @ t=8.3ms Half-sine wave	I_{FSM}	A	50						
Storage temperature	T_{stg}	°C	-55 ~ +150						
Junction temperature	T_j	°C	-55 ~ +125			-55 ~ +150			
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	70						
	$R_{\theta J-L}$	°C /W	20						

OM SENI

Electrical Characteristics (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	SS22F	SS24F	SS26F	SS28F	SS210F	SS215F	SS220F
Maximum instantaneous forward voltage	$I_F=2.0A$	V_F	V	0.55		0.70		0.85		0.95
Maximum DC reverse current at rated DC blocking voltage	$V_R=V_{DC}, T_A=25^\circ C$	I_{R1}	mA	0.5			0.05			
	$V_R=V_{DC}, T_A=100^\circ C$	I_{R2}		50			10			
Typical junction capacitance	4.0V DC, 1MHz	C_J	pF	160			80			

Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

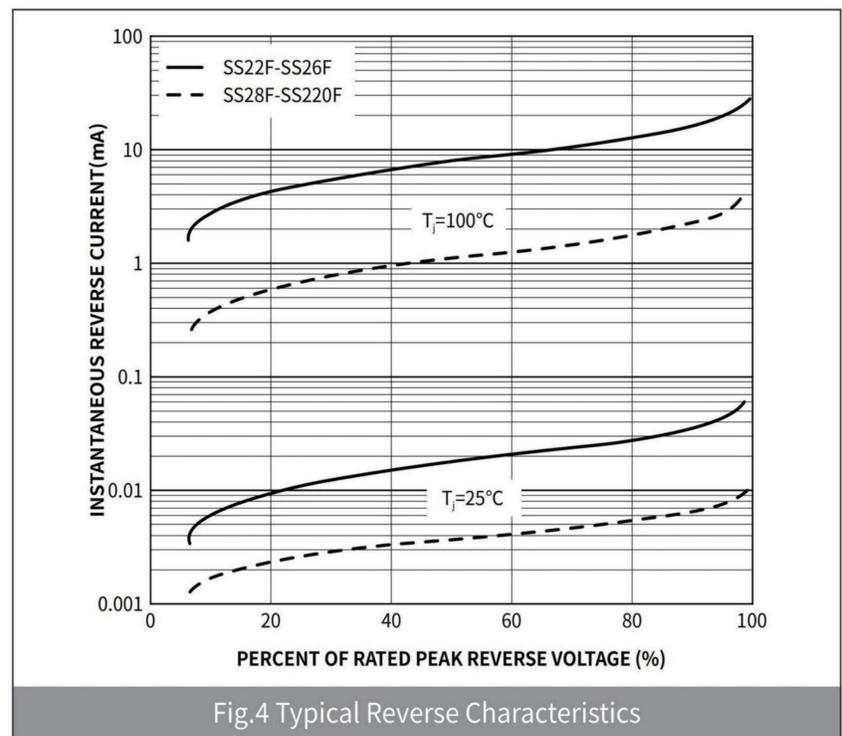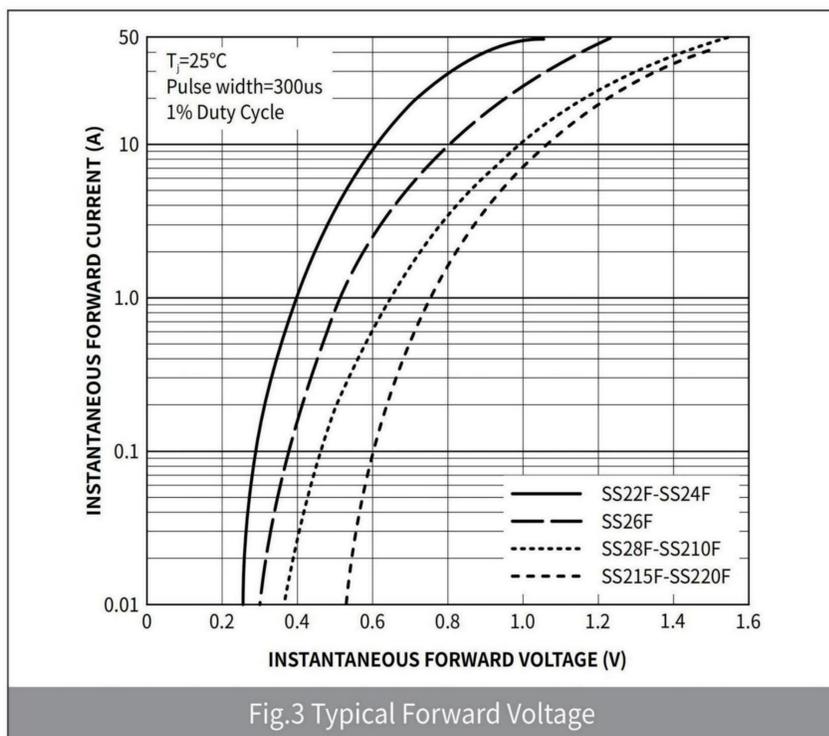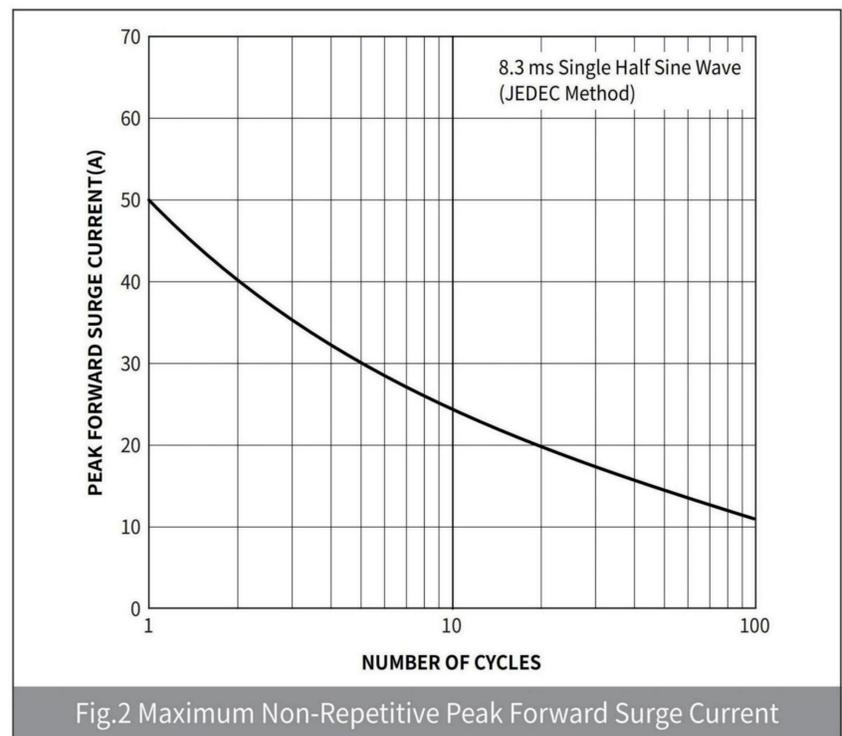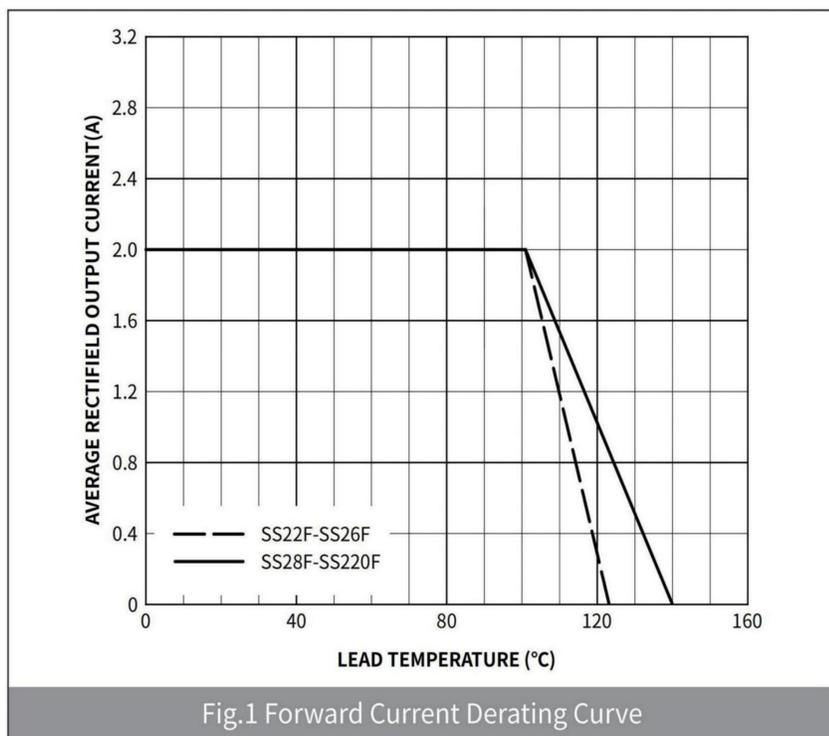


OM SENI

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SMAF	R1	0.034	3000	12000	120000	7"
SMAF	R2	0.034	7500	15000	75000	11"
SMAF	R3	0.034	7500	15000	75000	13"

Package Outline Dimensions (SMAF)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.30	1.60	0.051	0.063
B	3.30	3.70	0.129	0.145
C	2.40	2.70	0.094	0.105
D	4.40	4.90	0.172	0.191
E	0.90	1.20	0.035	0.047
F	0.80	1.20	0.031	0.047
G	0.12	0.20	0.005	0.008

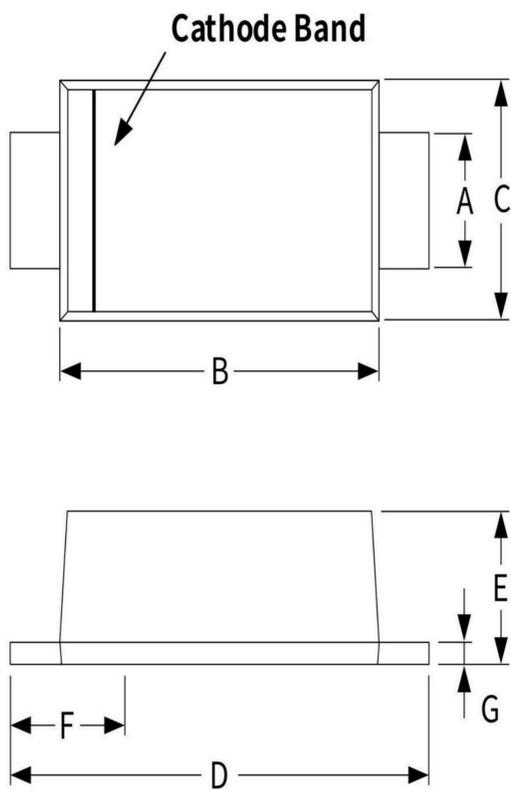

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
M	1.80	-	0.070	-
J	1.60	-	0.063	-
K	-	2.2	-	0.086

